PARKAY® | INFINITY

SPEC SHEET

COLORS & ACCESSORIES

NATURAL VINE



LF-PARINFNAT

SERENE OAK



LF-PARINFSER

SANDY PATH



LF-PARINFSAN

SUNSET VALE



LF-PARINFSUN

BLONDE LEAF



LF-PARINFBLO

TOASTED OAK




LF-PARINFBLO



Flush stair nose square
(FSN)



Multipurpose
(MP)



T-Molding
(TM)

SPECS

- Realism with 52 Unique Planks Faces
- Waterproof Performance
- Superior Durability
- Scratch And Worry Free
- Low Care / Manintenance
- Sustainable Sourced
- Enviromentally Friendly
- Effortless Installation
- Pet & Kids Friendly

PRODUCT	LAMINATE WOOD BASE FLOORING
COLLECTION	INFINITY
WIDTH	9.5"
LENGTH	86-5/8"
THICK	12MM + 2MM IXPE PAD
UNIQUE PLANKS	52
RESIDENTIAL WARRANTY	35 YEARS
COMMERCIAL WARRANTY	10 YEARS
MADE IN	ASIA
INSTALLATION TYPE	FLOATING
PLANKS/BOX	4
SQFT/BOX	22.64
BOX/PALLET	40
BOX/WEIGHT LB	51
WEIGHT/PALLET LB	2,050

INSTALATION INSTRUCTIONS

Parkay Infinity WPL - Laminate Series

1. **Flooring needs to be acclimated.** Stored flat and fully supported during shipping and storage. Allow product, in an unopened package, to condition in the room where installation is to take place at a constant temperature between 68°F and 77°F or 20° – 25°C for a period of 48 hours prior to installation.

2. Check flooring for possible defects prior to the installation. **Complaints can only be accepted before installation.** Slight variations in color and textures are designed to enhance its natural appearance. Mixing planks, from 3 to 4 different boxes creates a more realistic look.

3. Be aware that when exposed to **excessive temperatures and direct sunlight flooring will expand and contract causing problems with the locking system.** Please consider these exposures when choosing the area to install your flooring.

4. **Flooring is not recommended to be installed in facilities with walkers, wheelchairs or extended care use, or in facilities with movement of heavy displays, racks, dentist chairs etc. Do not fix or place any extremely heavy object on top of this floor.** All these types of installations and cases may exert extreme stress and compromise the locking system of the flooring. **Chair mats must be used under office chairs.**

5. **Subfloors must be clean of debris, structurally sound, solid, stable, level, plumb**, to ensure no more than 3/16" unevenness per 10-foot span.

6. Subfloors presenting vapor emotions between 2.5% to 5% (CM-Method), must install a 6mil Poly-plastic block before laying the cushioned underlayment. **All concrete subfloors must use plastic block for extra moisture protection.** Parkay Floors recommends "Plasticguard 6" as the ideal poly block to protect against moisture.

7. Floor has approximately 30-35 unique planks and creates a non repeat floor design if mixed accordingly, planks must be inspected and mixed for max design definition.

8. Flooring can be installed over existing firm floors (Linoleum, PVC), non-grout separation tile floors, but **all wood or laminate floors must be removed.**

9. Since this floor requires a floating installation, **a minimum expansion gap of 1/2" must be left along the entire perimeter** of the area and fixtures, to allow expansion.

10. Any flooring area exceeding 1,225 Square Feet and/or 35 Linear Feet must use transition moldings.

11. A maximum of 10% sheen variation in between planks is consider normal. Floor planks must be mixed

12 **Flooring is not recommended to be installed over any electrical radiant heating systems. Only radiant heated system using water are recommended.** Max heating temperate must not exceed 81°F. These Instructions must be followed:

- → Before installing, make sure to test the heating system at its maximum capacity to force out any residual moisture and to make sure it's working properly.
- → Moisture content on screed must not exceed 1.5%.
- → Shut down the heating system at least 48 hours prior to installation.
- → Keep room temperate between 68°F and 77°F during the installation.
- → After flooring is install, turn on the heating system gradually, from minimum to maximum within 1-hour period.

13 **Agree with the client on which direction the floor boards should run** since this influences the visual size ratio of the space.

14 **Pre-plan the floor by measuring the room first.** If the width of the last row is less than 2" (5cm) saw the first and the last plank in equal width. We recommend including an additional 5-8% to allow for errors and cutting waste.

15 **Snap the lines on the substrate to identify the layout reference points.** Planks should be set using this reference to ensure boards are aligned and will lock together correctly.

16 **The use of protected pull bar and tapping block** is recommended to ensure a successful install.

17 **Flooring provides a very tight fit.** Proper care must be used to ensure all seams are tight at end of install. An unprofessional installation or use of improper tools can result in damage to the Click profiles. Do not lean boxes or planks on a vertical position against the floor, since it might brake the click system. Floor noise is normal and will vary from one installation type to the next. Occasional noise is due to structural movement and may relate to sub-floor type, flatness, deflection, and/or related to the fasteners, changes in environmental conditions, relative humidity and the amount of topside pressure applied to the flooring. For these reasons, floor noise is not considered a product or manufacturer defect.

18 **If more than 5% of the product pulled out of the cartons is showing defects, stop the installation** immediately and contact your, Parkay® representative.


19 **Product cannot be used for exterior applications.** Never install on ceilings or countertops.

Flooring can have slight color variations in between production runs. Before starting the installation, it is best to check the production run # which is indicated on the label on the carton. If you find that you have cartons from different production runs, it is highly recommended that you open cartons and install a mix of planks from each different production run on your floor. This will result in a more natural looking floor.

HOW TO INSTALL
Material required

→ Calcium Chloride Moisture Test.
→ 1/2" Thick Spacers on edges.
→ 100% Transparent Silicon Sealant on edges.
→ PE Foam Backer Rod
→ Finish Putty and felt pads for under furniture.

STEPS TO FOLLOW
Parkay WPL Infinity Collection

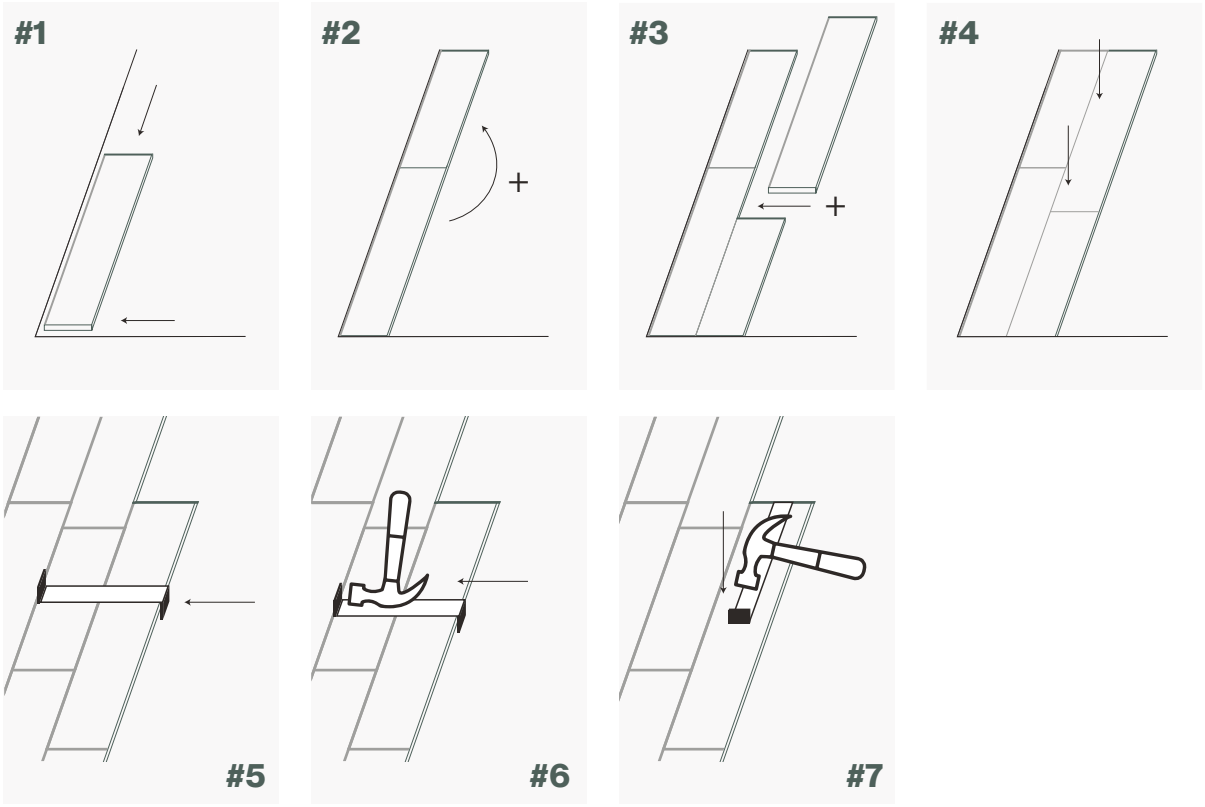

#1 Start with the first plank in the left corner of the room, tongue-side facing out from the wall to the length and to the right on the width. Work from left to right.
→ Add spacers in between the plank and the wall to create a 1/2" expansion gap.

#2 Position the following planks as an exact extension of the first one.
→ Cut to fit the last plank of the row. To do this you can use a laminate flooring cutter as Raptor M13 (www.masterscart.com) or a miter saw to cut thru the plank at the appropriate point.

#3 Begin the second row with the cut-off end to start the next and subsequent rows. Allow at least a 8" stagger for the end seams. For positioning the planks together, starting with the first board in the row, raise the plank at a 45-degree angle, insert the lengthways tongue into the lengthways groove and lower the sheet while holding the two together until they are flat and tightly together. Close the join using hand pressure or tapping block or pull bar.

#4 Lever the next plank in place from the front side, so that only a very short distance remains for it to be pushed into the lengthways connection.


#5 6 7 Raise the plank slightly and push it into the lengthways tongue, first close to the front connection then the rest. Make sure seams are tight on ends and sides using a pull bar or tapping block before proceeding. Continue the installation to the last row of planks, as described.

HOW TO SHORTEN DOORFRAMES: Position a lose plank facing down close to the doorframe and cut with a jamb saw.


People can walk on the flooring immediately after the installation. Remove the wedges. Nail or screw moldings to the wall, never to the floor.

INSTALLATION

WITH AN EXISTING BASEBOARD:

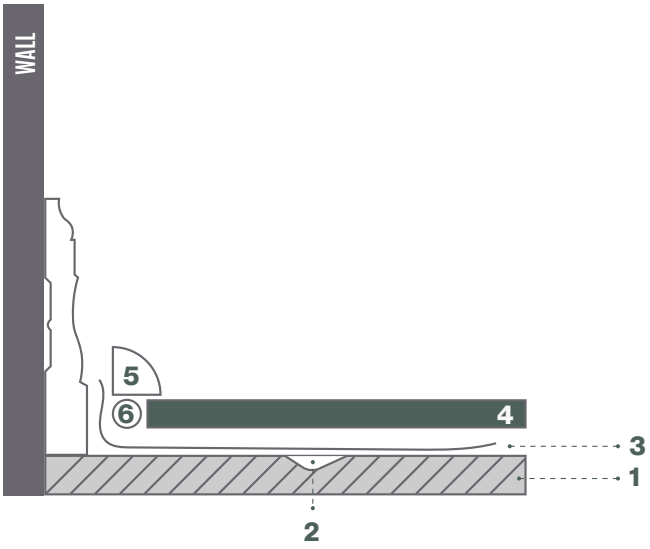

WITHOUT AN EXISTING BASEBOARD:

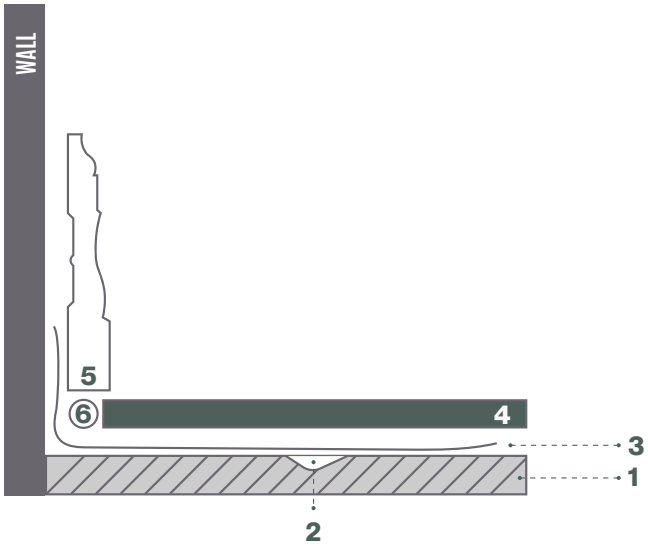

1. Concrete / Wood Sub-Floor
2. Leveler (if required)
3. 6mil Poly Plastic Sheet (show 4' up the wall)
4. Infinity WPL Flooring
5. Quarter-Round
6. Siliconized Caulking

MAINTENANCE

Clean regularly with a damp mop with a laminate floor cleaner, available at your local market. Do not spray excessively, pour liquid directly or leave moisture standing on the laminate floor. Always use chair protectors under furniture and on chair legs. Teflon protectors are best.

WARRANTY

35 years residential / 10 years light commercial warranty

Our 10 years limited light commercial warranty for PARKAY WPL FLOORING means that for five years, from the date of purchase from the original owner and first installation of the product, your floor will be free from manufacturing defects and will not wear through when installed and maintained according to instructions supplied with each carton. This warranty applies only to the original end user with a proof of purchase, warranty is not transferable. Floors must have been installed by a licensed and insured professional to be able to process any claim. The guarantee is for replacement or refund of the material only, no labor. Claims for wear must show a minimum dime size area. High-heeled shoes, rolling carts, furniture and chairs without protective pads can damage the floor and are not covered by this warranty.

Warranty covers against: Staining, Wear, Fading as a result or natural or artificial light, damage by moisture from everyday household spills and manufacturing defects. Floor will only be replaced for one of the same monetary value.

If more than 5% of the product pulled out of the cartons is showing defects, stop the installation immediately and contact your Parkay representative. Transition moldings are not covered under this warranty. Scratches and loss of gloss are not considered a wear-through issue. Up to 10% gloss variance is considered completely normal between planks.

This warranty excludes damage by natural disasters. This warranty excludes floors in contact with moisture trapped beneath the floor. The general warranty is pro rata (35 years for flooring). A pro rata warranty is one that provides for a refund or credit that decreases according to a set formula as the warranty period progresses. A claim process takes up to 90 days to process, from the date Parkay is contacted. We require a detailed description with images of the issue that clearly show the problem. Contact Parkay dealer no later than 15 days after the discovery of the defect. Your dealer will arrange for proper inspection and coordinate a resolution of your claim.

For service under this warranty or technical questions,
please go to our website or contact your local retail.

SCAN » INFO & LIVE

parkayfloors.com